

Installation Instructions

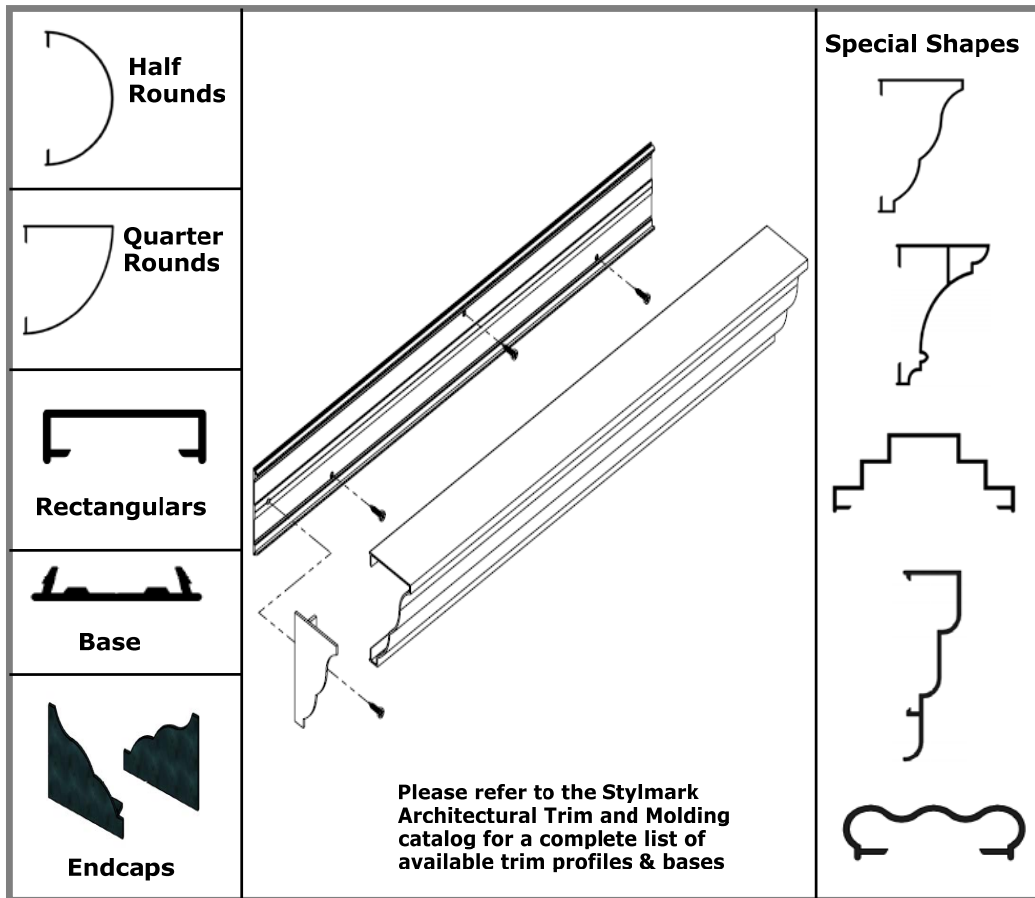


Figure 1

INSTALLATION INSTRUCTIONS

Before you begin

These instructions illustrate the installation of the Stylmark Trim Maker[®] system. Trim Maker is available in a variety of shapes and sizes; the illustration above is a representative sample of the shapes available. See your Stylmark catalog for complete Trim Maker options. If you have questions during assembly, call 800-328-2495 to request technical assistance.

Tools you'll need

- Chalk line or carpenter's pencil
- Rubber mallet
- Screwdriver
- #8 Flat head screws (obtain locally)

Please read these instructions carefully before beginning installation.

Stylmark Installation Instructions: Trim Maker®

Getting Started:

These instructions are for Stylmark Trim Maker. Installation is the same for all shapes & sizes of Trim Maker. Trim Maker can be ordered in stock lengths or custom fabricated to meet your design requirements.

Step-by-Step Instructions:

1. Determine placement of the Trim Maker® mounting plates on the wall and mark the position with chalk line or pencil. **See Figure 2.**
2. Secure the mounting plates to the wall using customer-supplied screws. Insert the screws through the pre-drilled holes in the mounting plates. Insert and fasten end caps. **See Figure 3.**
3. Snap trim onto mounting plates. If necessary, use a rubber mallet. **See Figure 4.** Note: Use caution when using the rubber mallet to avoid denting trim.
4. As an option, stack Trim Maker and build molding into desired configuration. **See Figure 5.**

